

HEM & SAW

—The saw that cuts straight.—

Dual Column CT2000HA-DC-C

Capacity: 20" High x 20" Wide

Blade Size: 2" x 22'2" x .050"

Motor: 20 HP

Hydraulics: 2 HP




*Shown w/ Optional Top Clamps

DESIGNED AND BUILT IN THE



Standard Features:

- Swing-Away Console - All Function Control
- 2 Degree Permanent Arm Tilt
- Variable Frequency Drive for Blade Speed
- Full Stroking Vises
- Roller Guides - Entry and Exit
- Powered Chip Brush
- Powered Guide Arm
- Arm Height Adjustment From the Console
- Chip Auger System
- Automatic Shut Off
- Powered Blade Tension
- Cut Watcher System
- Shadow Light System
- Computer Controlled Feed System (CCF)
- Material Jogging Feature
- Flood Coolant System
- 24" Solid Discharge Table
- 3rd Vise on Feed
- Hydraulic Computer Controlled Traverse (HCCT)
- 0 - 24" Stroke Bar-Feed

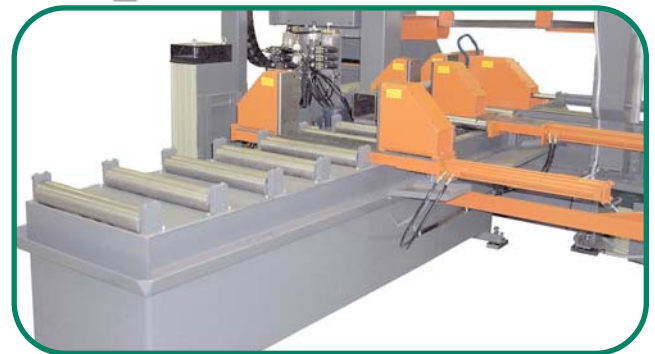

Optional Features:

- Set of Full Capacity Top Clamps - Main & Feed
- Full Capacity Top Clamp - Outboard Vise
- Laser Light System
- Guide Cap Camlocks
- Outboard Powered Vise on Dishcharge
- 0 - 48" Stroke Bar Feed System In Lieu of 24"
- 0 - 72" Stroke Bar Feed System in Lieu of 24"
- Roller Discharge in Lieu of Standard Solid
- Spray Mist Coolant System
- Pedastal Mounted Console

P. O. Box 1148 • Pryor, OK • 74362

www.hemsaw.com

Toll Free: (888) 729-7787 • Phone: (918) 825-4821

Fax: (918) 825-4824 • E-Mail: info@hemsaw.com