



## Vertical Series V100LA-60

**Capacity:** 18" Horizontal x 22.25" Vertical @ 90°  
18" Horizontal x 15.25" Vertical @ 45° (Left)  
18" Horizontal x 15.125" Vertical @ 45° (Right)  
18" Horizontal x 10.25" Vertical @ 60° (Left)  
18" Horizontal x 7.25" Vertical @ 60° (Right)

**Blade Size:** 1-1/4" x 15'6" x .042"


**Motor:** 5 HP



Console Pivots from Front  
to Right Side of Saw

### Standard Features:

Swing Away Console  
- All Function Control  
- Touch Cut Screen  
Powered Main & Feed Vise  
Variable Vise Pressure  
Powered Blade Tension  
Powered Guide Arm  
Powered Arm Tilt  
Infinitely Variable Blade Speed Drive  
- 70-300 SFPM  
LED Blade Speed Readout  
Adjustable Cutting Pressure & Feed Rate  
Cut Watcher System  
Forward Cut Stop  
Flood Coolant System  
0-24" Stroke Bar Feed System (4 Indexes)  
Set of Idle, Non-Lifting Rollers  
- One on Each Side of Saw Base  
Bolttable Side Wings

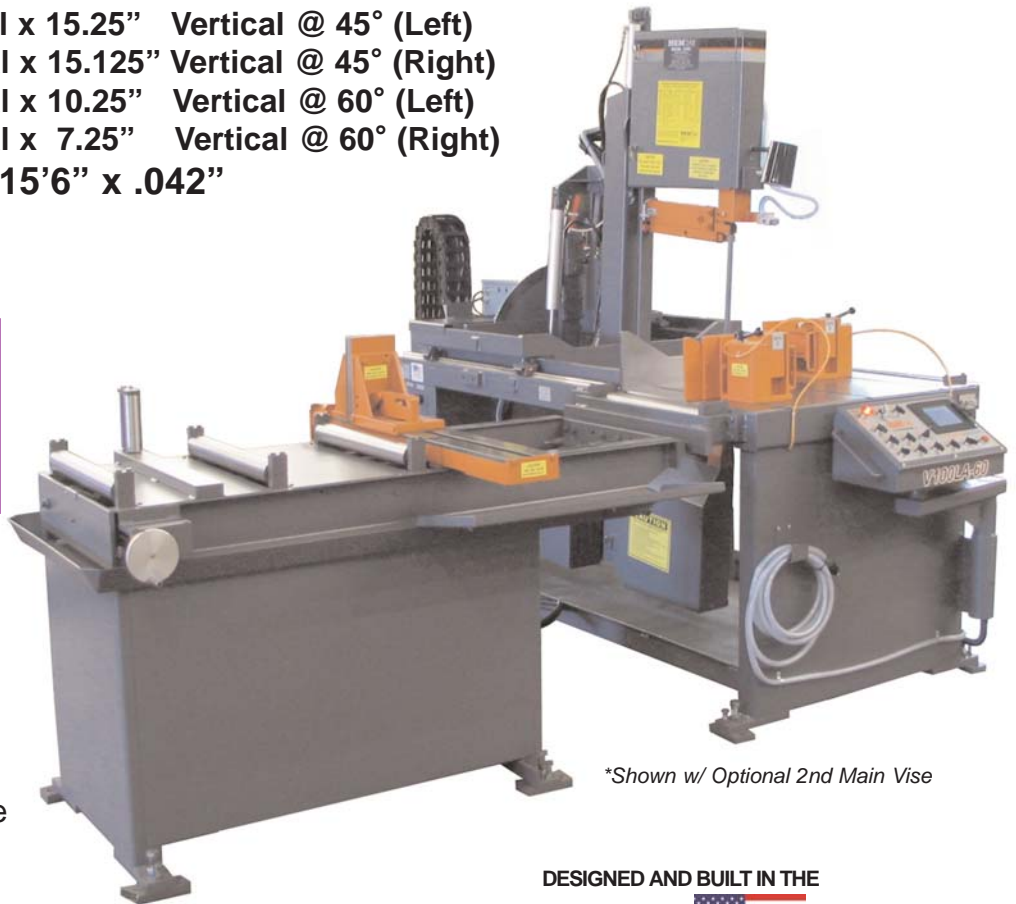

*\*Shown w/ Optional 2nd Main Vise*

DESIGNED AND BUILT IN THE



### Optional Features:

- Second Main Machine Vise
- 3rd Holding Vise on Feed
- Full Capacity Swing-Away Top Clamp  
- Main Vise
- Full Capacity Top Clamp - Feed Vise
- Laser Light System
- Spray Mist Coolant System
- Feed Direction Change to Right Side
- Idle & Powered Tables

[www.hemsaw.com](http://www.hemsaw.com)

P. O. Box 1148 • Pryor, OK • 74362

Toll Free: (888) 729-7787 • Phone: (918) 825-4821

Fax: (918) 825-4824 • E-Mail: [info@hemsaw.com](mailto:info@hemsaw.com)