




## Vertical Series V140HA-60

**Capacity:** 24" Horizontal x 28.5" Vertical @ 90°  
24" Horizontal x 21" Vertical @ 45° (Left/Right)  
24" Horizontal x 13.5" Vertical @ 60° (Left)  
24" Horizontal x 13" Vertical @ 60° (Right)

**Blade Size:** 1-1/2" x 20'0" x .050"

**Motor:** 10 HP

**Hydraulics:** 5 HP

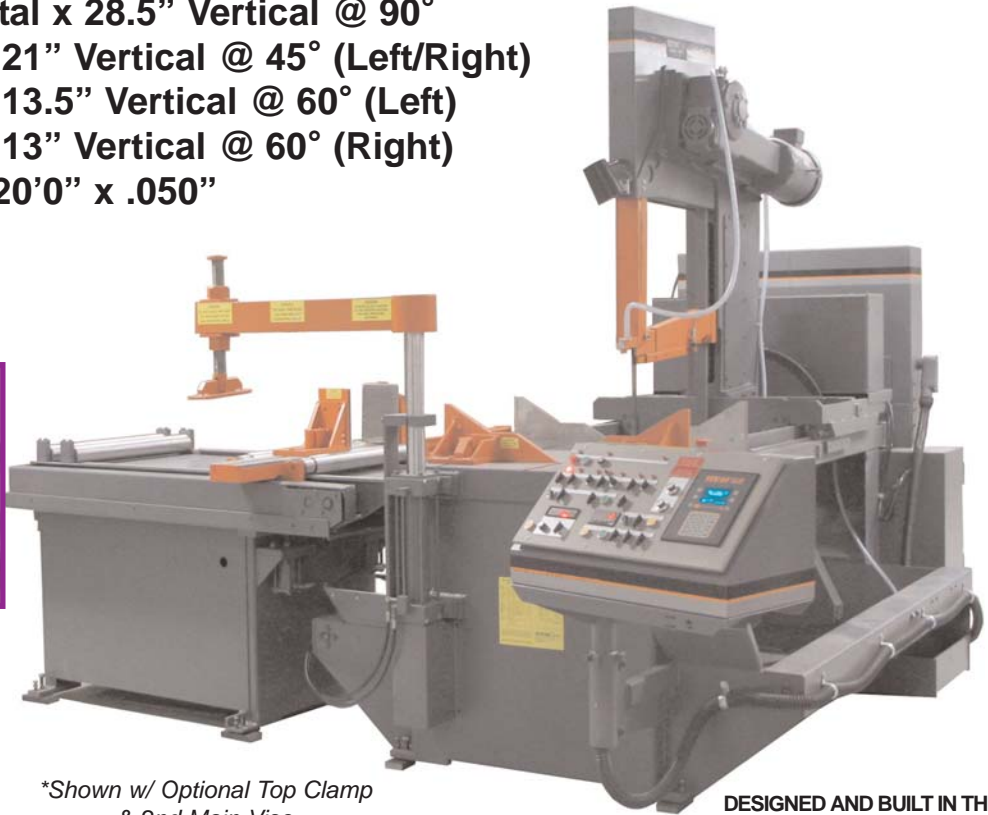

*\*Shown w/ Optional Top Clamp  
& 2nd Main Vise*

DESIGNED AND BUILT IN THE



### Standard Features:

- Swing Away Console
  - All Function Control
- Full Stroking Vises
- Power Blade Tension
- Power Guide Arm
- Programmable Tilt
- Power Tilt with Angle Read Out
- LED Blade Speed Read-Out
- Electronically Controlled Traverse (ECT)
- Cut Watcher System
- Computer Controlled Feed System
- Material Jogging Feature
- Power Lift Up Table
- Powered Chip Conveyor System
- Flood Coolant System
- 0-48" Stroke Bar Feed System

### Optional Features:

- Second Main Machine Vise
- 3rd Holding Vise
- Blade Saver System
- Full Capacity Top Clamps - Main & Feed Vises
- Reduced Capacity Top Clamps
  - Main & Feed Vises
- Laser Light System
- 0 - 72" Stroke Bar Feed System
- Smart Feed Option for 48" or 72" Bar Feed
- Spray Mist Lubrication System
  - Manual Connect
- Flood/Mist Selector Switch
- Feed Direction Change
- Power Raised Lift-Up Rollers

[www.hemsaw.com](http://www.hemsaw.com)

P. O. Box 1148 • Pryor, OK • 74362  
Toll Free: (888) 729-7787 • Phone: (918) 825-4821  
Fax: (918) 825-4824 • E-Mail: [info@hemsaw.com](mailto:info@hemsaw.com)