

HEM[&]SAW

—The saw that cuts straight.—

Vertical Series VT140HA-60


Capacity: 22" Horizontal x 27" Vertical @ 90°
22" Horizontal x 20" Vertical @ 45° (Left/Right)
22" Horizontal x 13.5" Vertical @ 60° (Left)
22" Horizontal x 13" Vertical @ 60° (Right)

Blade Size: 1-1/2" x 20'0" x .050"

Motor: 10 HP

Hydraulics: 5 HP

Arm Cant: 4°

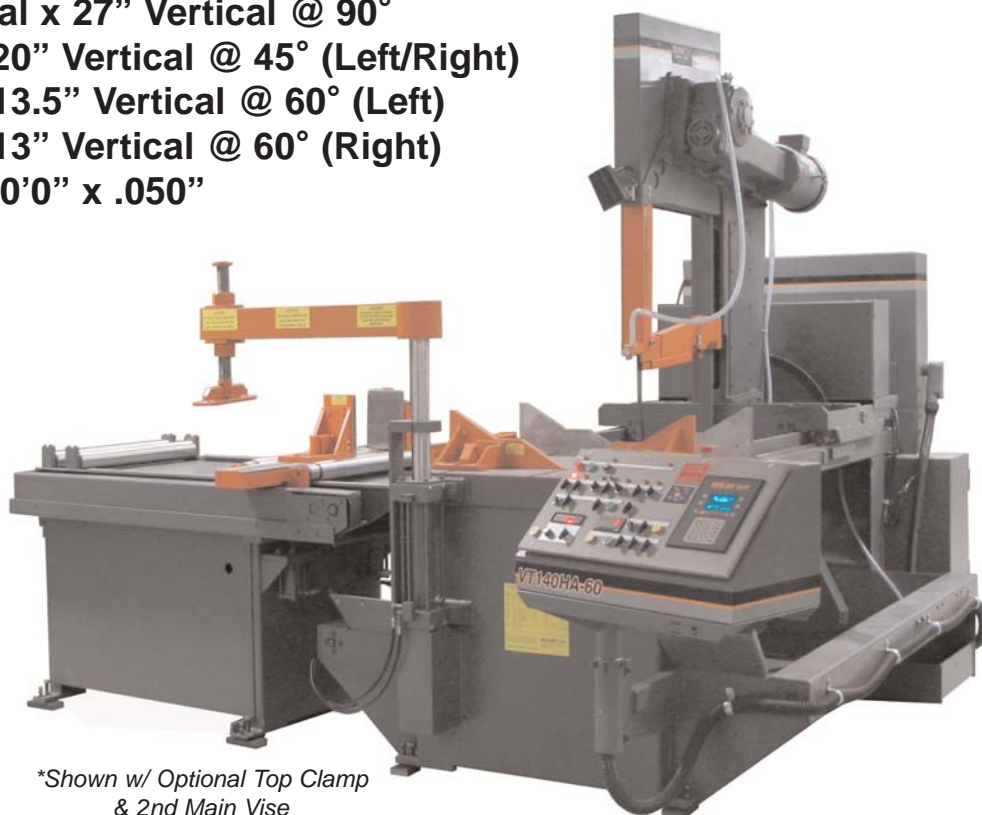

**Shown w/ Optional Top Clamp
& 2nd Main Vise*

DESIGNED AND BUILT IN THE

U.S.A. 

Standard Features:

- Swing Away Console
 - All Function Control
- Full Stroking Vises
- Powered Blade Tension
- Powered Guide Arm
- Programmable Tilt
- Powered Tilt with Angle Read Out
- LED Blade Speed Read-Out
- Electronically Controlled Traverse (ECT)
 - Controls Feed Rate & Cutting Force
- Cut Watcher System
- 0-48" Stroke Bar Feed System
- Computer Controlled Feed System
- Powered Lift-Up Feed Table
- Material Jogging Feature
- Powered Chip Conveyor System
- Flood Coolant System
- Set of Idle Rollers

Optional Features:

- Second Main Machine Vise
- 3rd Holding Vise
- Blade Saver System
- Full Capacity Top Clamps - Main & Feed Vises
- Reduced Capacity Top Clamps
 - Main & Feed Vises
- Laser Light System
- 0 - 72" Stroke Bar Feed System
 - w/ 3rd Holding Vise
- Spray Mist Coolant System
- Feed Direction Change to Right Side
- Powered Raised Lift-Up Rollers
- Idle & Powered Tables

www.hemsaw.com

P. O. Box 1148 • Pryor, OK • 74362

Toll Free: (888) 729-7787 • Phone: (918) 825-4821

Fax: (918) 825-4824 • E-Mail: info@hemsaw.com

Hem, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any model, at any time without notice and without incurring any obligations. Dimensions may vary. Please contact Hem, Inc. for a certified dimensional drawing of your specific model. Copyright 112800 Hem, Inc. All rights reserved.