



Wide Flange WF190LA-DC-C


Capacity: 25" High x 44" Wide

Blade Size: 2" x 29'0" x .063"

Arm Tilt: 9.2°

Motor: 15 HP

Hydraulics: 5 HP

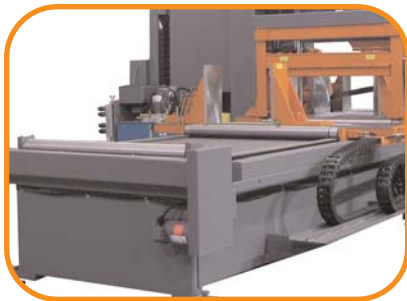

**Shown w/ Optional Full Capacity Main, Feed, Outboard Vise Top Clamps & Optional Free Standing Console*

Standard Features:

- Swing-Away Console - All Function Control
- Full Stroking Bi-Directional Vises
- 0-72" Stroke Bar-Feed w/ Drop-In Rollers
- Computer Controlled Feed System
- 3rd Vise on Feed
- Material Jog
- Guide Cap Camlocks
- Chip Conveyor System
- Cut Watcher System
- Variable Frequency Controller
- LED Blade Speed Readout
- Powered Blade Tansion
- Powered Guide Arm
- Electronically Controlled Traverse (ECT)
Controls Feed Rate & Cutting Force
- 24" Roller Discharge Table
- Flood Coolant System

DESIGNED AND BUILT IN THE



Optional Features:

- Bi-Directional Outboard Powered Vise
- Set of Full Capacity Top Clamp
- Main & Feed Vise
- Full Capacity Top Clamp - Outboard Vise
- Laser Light System
- Shadow Light System
- Cutting Vibration Dampening System
- Hydraulic Computer Controlled Traverse
- Spray Mist Lubrication System
- 2-5/8" Blade Option
- Pedestal Mounted Console
- Free Standing Console

www.hemsaw.com

P. O. Box 1148 • Pryor, OK • 74362

Toll Free: (888) 729-7787 • Phone: (918) 825-4821

Fax: (918) 825-4824 • E-Mail: info@hemsaw.com