

HEM[&]SAW

— The saw that cuts straight. —>

Vertical Series VT100LA-60

Capacity: 18" Horizontal x 20.75" Vertical @ 90° (22.5 w/o Cant)
18" Horizontal x 14.25" Vertical @ 45° (Left) (15.25 w/o Cant)
18" Horizontal x 14" Vertical @ 45° (Right) (15.125 w/o Cant)
18" Horizontal x 9.75" Vertical @ 60° (Left) (10.25 w/o Cant)
18" Horizontal x 6.75" Vertical @ 60° (Right) (7.25 w/o Cant)


Blade Size: 1-1/4" x 15'6" x .042"

Motor: 5 HP

Arm Cant: 3° - Arm Can Be Adjusted to
Straight Cut Position



Console Pivots from Front
to Right Side of Saw

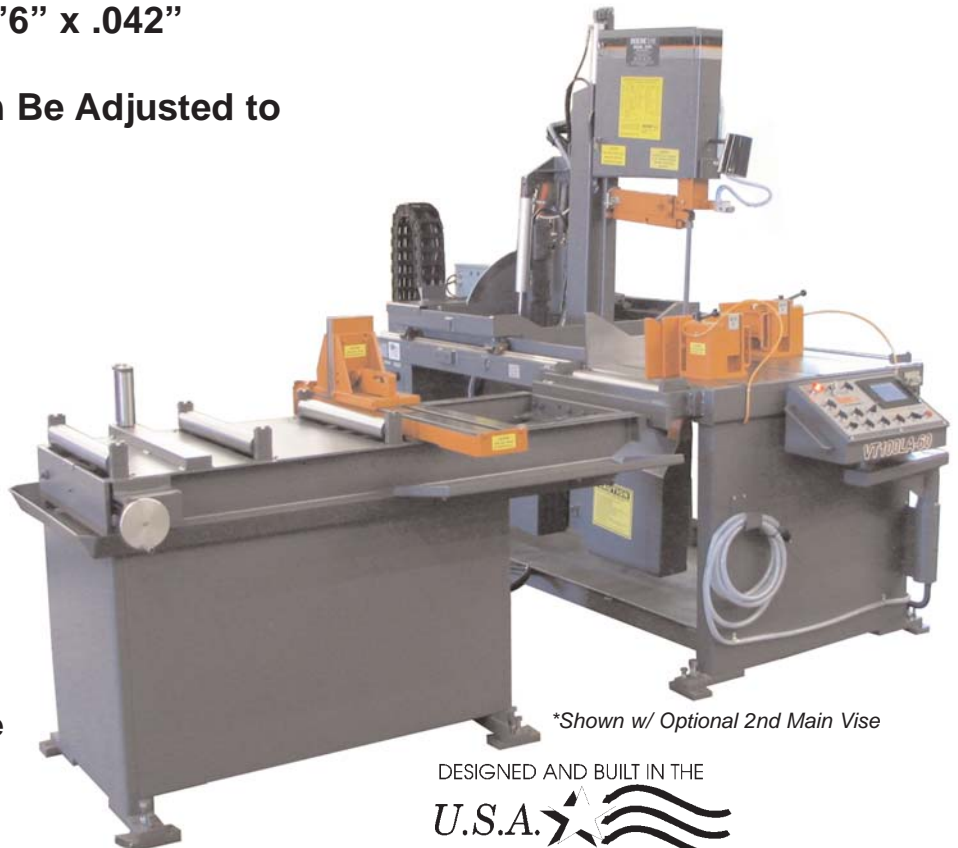

*Shown w/ Optional 2nd Main Vise

Standard Features:

Swing Away Console

- All Function Control
- Touch Cut Screen

Powered Main Machine Vise

Variable Vise Pressure

Powered Blade Tension

Powered Guide Arm

Powered Head Tilt with Angle Read Out

Infinitely Variable Blade Speed Drive

- 70-300 SFPM

Adjustable Cutting Pressure & Feed Rate

Cut Watcher System

Forward Cut Stop

Flood Coolant System

0-24" Stroke Bar Feed System - with 4 Indexes

Set of Idle, Non-Lifting Rollers

- One on Each Side of Saw Base

DESIGNED AND BUILT IN THE

U.S.A. 

Optional Features:

- Second Main Machine Vise
- 3rd Holding Vise
- Full Capacity Swing-Away Top Clamp - Main Vise
- Full Capacity Top Clamp - Feed Vise
- Laser Light System
- Spray Mist Coolant System
- Feed Direction Change to Right Side
- Idle & Powered Tables

www.hemsaw.com

P. O. Box 1148 • Pryor, OK • 74362

Toll Free: (888) 729-7787 • Phone: (918) 825-4821

Fax: (918) 825-4824 • E-Mail: info@hemsaw.com

Hem, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any model, at any time without notice and without incurring any obligations. Dimensions may vary. Please contact Hem, Inc. for a certified dimensional drawing of your specific model. Copyright 112800 Hem, Inc. All rights reserved.